

SOLTO WHITE

MARBLE COLLECTION






Solto White Marble 12x24 Honed
MARB0805



Solto White Marble 4x16 Chevron Honed
MARB0815



Solto White Marble 2x4 Honed
Mosaic / MARB0812

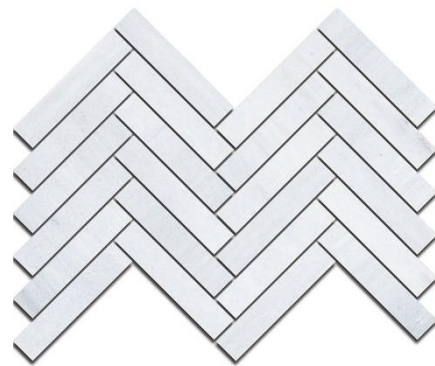

Solto White Marble Insignia 1.25x6
U/H Mosaic / MARB0814

TILE PERFORMANCE DATA

| TEST PERFORMED | TEST RESULTS | TEST STANDARD |
|--|--|--------------------|
| App. Density kg/dm ³ | 2.440 | EN 1936 |
| Open Porosity | 1.40 % | EN 1936 |
| Frost Resistance & Flexural Strength | 8.40 % (Loss by Flexural Strength) | EN 12371 |
| Flexural Strength | 22.00 Mpa | EN 12372 |
| Water Absorption at Atmospheric Pressure | 0.70 % | EN 13755 |
| Resistance to Ageing by Thermal Shock | 0.70 % Loss by Mass 1.85 % Loss by Dynamic Elasticity Modulus | EN 14066 |
| Slip Resistance | SRV : 10 | EN 14231 |
| Abrasion Resistance | 8.840 mm ³ / 50 cm ³ | EN 14157 Method B |
| Reaction to Fire | Class A1 | 96/603/EC decision |